

### MANUAL SEALLESS STRAPPING TOOL FOR STEEL STRAP — FLAT PACKAGE

#### TECHINICAL DATA / APPLICATIONS :

Steel strapping tool user friendly. Rugged construction for heavy duty applications. Standard on 16mm (5/8") strap guides for 13mm (1/2") and 19 (3/4") are included in the box.

**TIN (titanium) coating on all wearing parts. Steel tensioning lever.**

Package type	Flat (minimum 150mm—6") Minimum diam. For round pack 1000mm (40")
Joint type	Sealless
Strap quality	Standard & high tensile Rmax.=1100 N/mm2
Strap Width	from 13mm(1/2") up to 19mm (3/4")
Strap thickness Rmax=850 N/mm2	From 0,4mm up to 0,8mm (0.015"—0.031")
Strap thickness Rmax=1100 N/mm2	From 0,4mm up to 0,63mm (0.015"- 0.025")
Max. tension / Gear ratio	Around 4600 N / around 1: 17
Weight	Around 4,6 Kg
Order code IMA HT	128.160.040

- \* STRONGER BODY
- \* ERGONOMIC AND MODERN DESIGN
- \* EFFICIENT SEAL
- \* LOW FORCE TO OPERATE
- \* USER FRIENDLY




SEALLESS JOINT



STEEL TENSION LEVER

- EASY AND FAST ADJUSTMENTS

- EASY ACCES TO CLEAN AND TO PERFORM MAINTENANCE

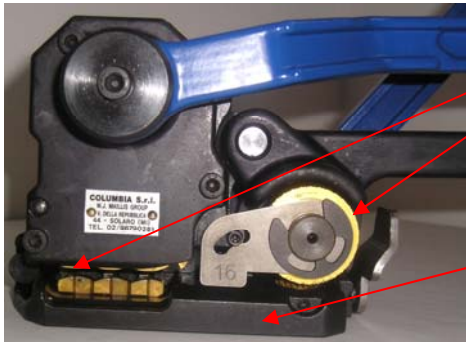


NEW TIN COATING

NEW FRAME




TURN THIS SCREW TO INCREASE OR DECREASE CUTTING AND SEALING VALUES

ADJUSTING CUT AND SEALING SCREW DETAIL

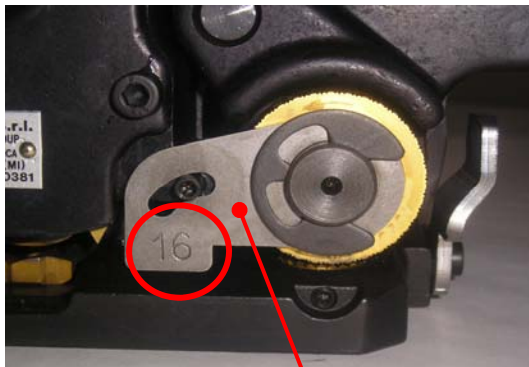

REPLACE THIS PART TO CHANGE THE STRAP SIZE EVERY STRAP GUIDE IS MARKED FOR SIZE

SIDE GUIDE STRAP DETAIL

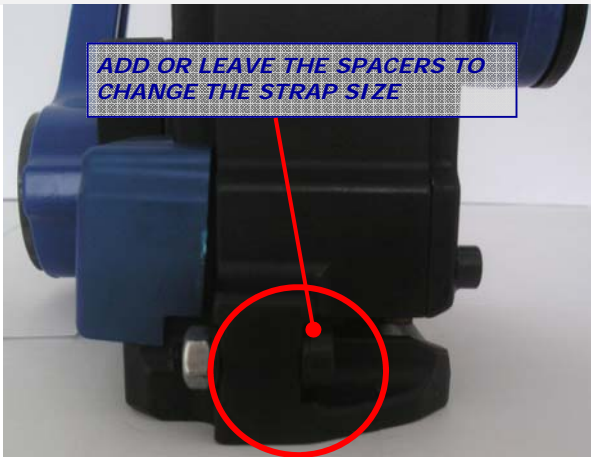

ADD OR LEAVE THE SPACERS TO CHANGE THE STRAP SIZE



FEEDWHEEL GAP ADJUSTING SCREW- DETAIL

OPTIONAL

STEEL CUTTING LEVER (COD.402011290)



REAR STRAP GUIDE ADJUSTABLE