

## Pneumatic Stapler Type 140/38-153

The BeA 140/38–153 takes wide crown staples type 140 in leg length from 14 to 38 mm. The main application of this compact and powerful tool is the manufacturing of frames and it is also used in the packaging industry. The wide crown staple is suitable for the fastening of cardboard, foil etc. on wood.



### Popular applications:

Packaging, frames

Length: 403 mm  
Width: 70 mm  
Height: 261 mm

### Technical data

Type description:	<b>140/38-153</b> Standard
Article code:	12000177
Magazine type :	Top loader
Safety:	Contact
Fastener type:	Type 140
Magazine capacity:	200
Fasteners per strip:	4 x 50
Operating pressure:	6 – 8 bar
Max. operating pressure:	8 bar
Air consumption/operation:	1.5 liters / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 79 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 87 dB
Weight:	2.8 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 4 m/s<sup>2</sup>

**Extras supplied with the nailer:** Operating instructions, spare parts list, service instructions, silencer. For safety reasons we recommend the BeA single release if working pressure allows this.

Subject to technical modifications.

### Accessories:

Articel code	Description
14403409	Remote valve with safety yoke
14403402	Remote valve, compl.
14403442	Mounting flange
14400899	High adjustable stop
14406201	Single actuation set

All BeA pneumatic tools can be jig-mounted  
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive  
for Machinery (89/392 EWG)


## Pneumatic Stapler Type 140/38-153

### Staples type 140



BeA Deutschland  
Befestigungstechnik  
P.O.Box 14 80  
D-22904 Ahrensburg  
Phone: (04102) 78-0  
Fax: (04102) 78-250  
www.bea-group.com  
e-mail: [info@bea-group.com](mailto:info@bea-group.com)

a division of  
Joh. Friedrich Behrens AG

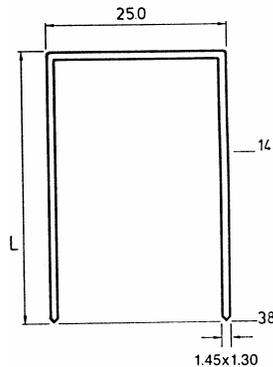

Description	L = Length mm
140/14 NK HZ	14
140/16 NK HZ	16
140/19 NK HZ	19
140/22 NK HZ	22
140/25 NK HZ	25
140/30 NK HZ	30
140/35 NK HZ	35
140/38 NK HZ	38

Other lengths and finishes are also available on request.

#### Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut