


StrapPack[®]

AUTOMATIC STRAPPING MACHINE

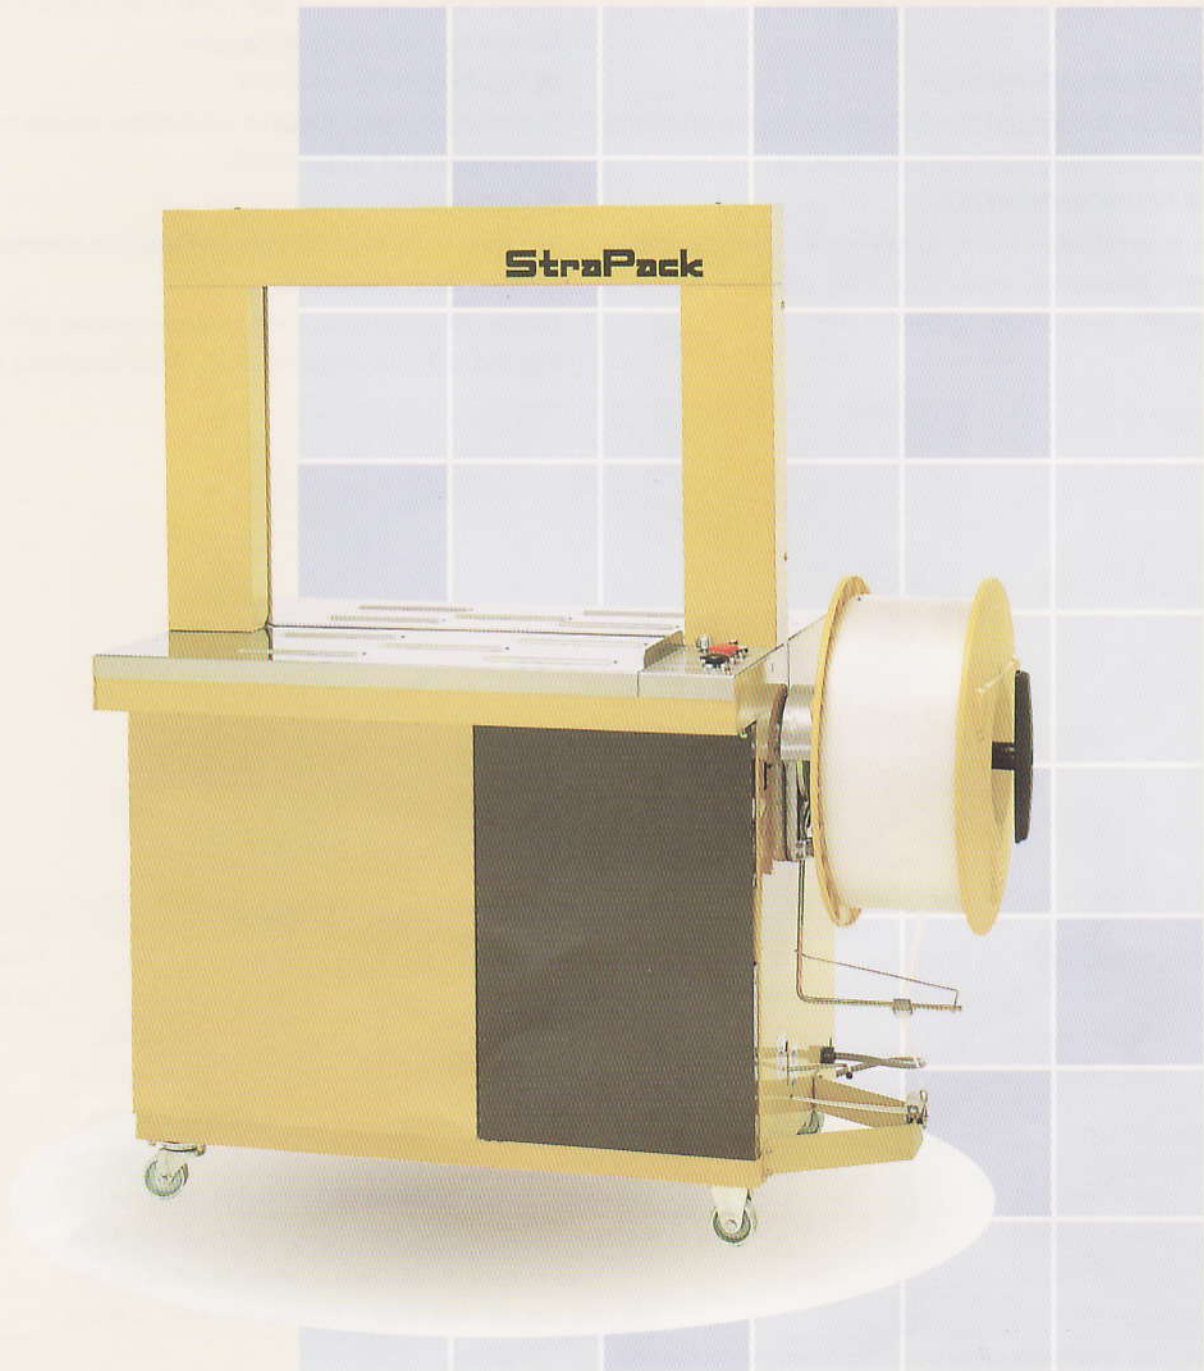

AQ-7

AUTOMATIC STRAPPING MACHINE



■ HIGH SPEED – 2.2 SECONDS / CYCLE

Minimum of 27 cycles per minute (depending on package size).

■ QUICK WARM-UP HEATER

Only 25 seconds required to reach operating temperature. Ready indicator lamp reduces wasted strap.

■ EASY TENSION CONTROL

Tension is adjustable via a conveniently positioned dial. Consistent tensioning from 0 to 70kg (80mm stroke) is provided by a tension arm system.

■ ENERGY CONSERVATION

Power supply is 200 / 220 / 240 / 380 / 400 / 415V, 3PH. Motors run only when necessary.

■ OIL-FREE MECHANISM


Sealing head never requires lubrication, saving service time and cleaning of components.

■ COMPACT

Machine body is small, light and easy to maneuver.

■ NEW ARCH SYSTEM

Newly designed arch ensures more precise strap positioning and reduces strap twisting. Arch variations available.

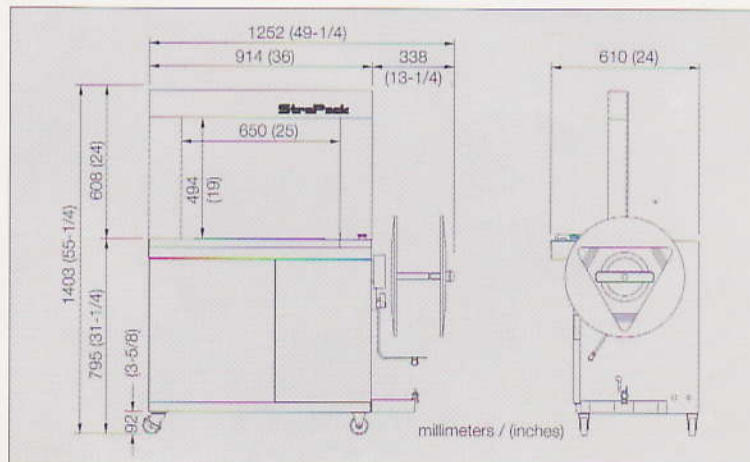

DIMENSIONS		Width	Height	Depth	Weight
		1252mm	1403mm	610mm	180kg
		49-1/4 in	55-1/4 in	24 in	396 lbs
TABLE HEIGHT		795mm		31-5/16 in	
ARCH SIZE		W 650 × H 500mm		W 25 × H 19 in	
PACKAGE SIZE	Max	W 620 × H 480mm		W 24-1/2 × H 18-7/8 in	
	Min	W 80 × H 30mm		W 3-1/8 × H 1-1/4 in	
JOINT / STTAP / COIL		heat seal / polypropylene / ID200 × OD450 × W200mm			
STRAP WIDTH		5, 6, 9, 12mm		1/4, 3/8, 1/2 in	
STRAP TENSION		up to 784N (80kgf, 176 lbf), 80mm (3-1/8 in) stroke			
POWER SUPPLY		200, 220, 240, 380, 400, 415V 3 phase 50 / 60Hz 0.85KVA			

Dimensions and specifications are subject to change without notice.

Modification rights reserved.

Pats., U.M. & design registered and/or pending.

© 2003 Strapack Corporation

DISTRIBUTED BY:

STRAPACK CORPORATION

1-2-17, Higashi Shinbashi, Minato-ku, Tokyo 105-0021, JAPAN
Phone 81-3-3289-1161 Fax. 81-3-3289-1160
(URL) <http://www.strapack.com> (E-mail) info@strapack.com

STRAPACK INC.

30860 San Clemente St. Hayward, CA 94544 U.S.A.
Phone 1-510-475-6000 Fax. 1-510-475-6090