

# StrapPack®


## Low Body Strapping Machine

The RQ-8L is the perfect machine when a low conveyor height and bottom seal strapping are required. Unlike side seal machines, the RQ-8L does not require packages to be shifted against the sealing head. It is ideal to strap heavy and/or bulk packages.

The cabinet height is only 432 millimeters or 17 inches (338 millimeters or 13 ¼ inches without casters).

Products longer than 915 millimeters/36 inches can be strapped automatically by interlocking a standard RQ-8L to an adjacent, powered conveyor. For shorter packages, the RQ-8L can be built with the powered belt tabletops and automation features of the RQ-8A series.

### ■ Standard Specifications

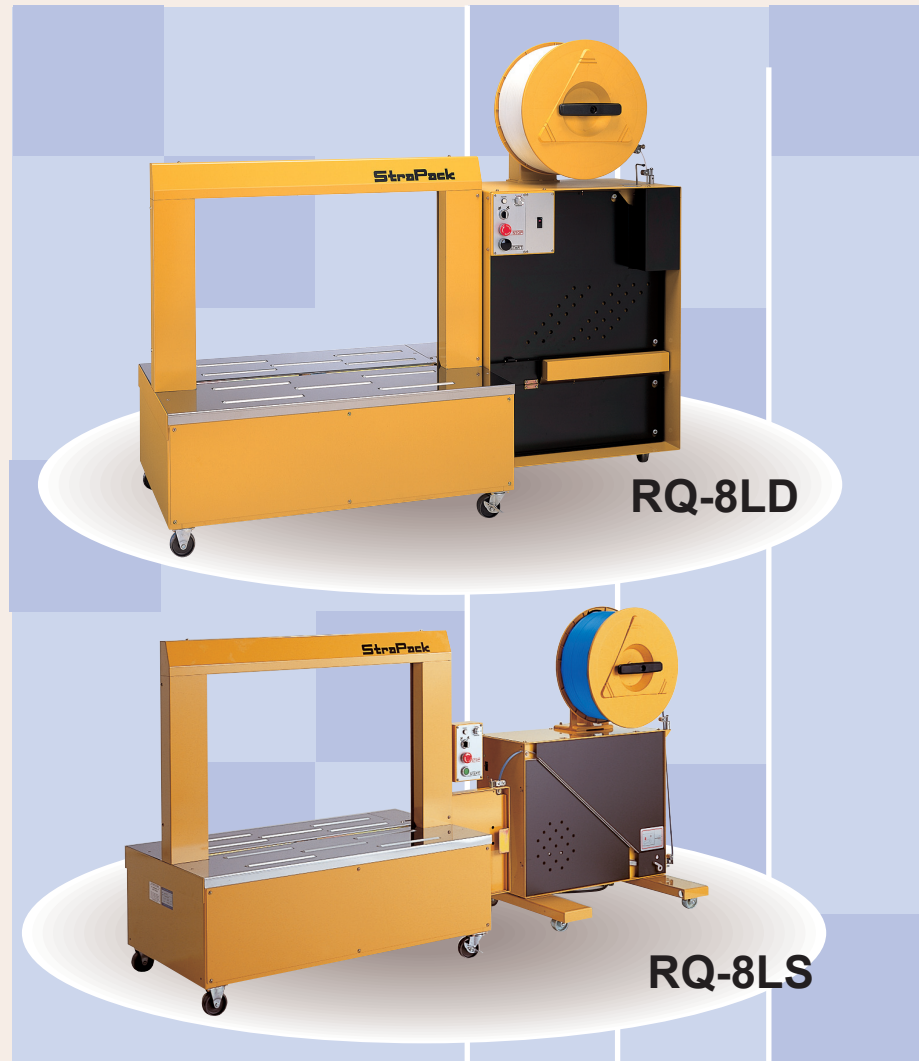

Model		RQ-8LD		RQ-8LS	
Dimension	Width	1863 mm	73 - 3/8 in.	1411 + 750 mm	55 - 1/2 in. + 29 in.
	Height	1547 mm	60 - 7/8 in.	1141 mm	44 - 7/8 in.
	Depth	609 mm	24 in.	609 mm	24 in.
	Table Height	432 mm 17 in.			
Package Size	Min.	W 80 X H 30 mm W 3-1/8 X H 1-1/8 in.			
Speed		1.8 sec / strap			
Joint / Strap/ Coil		heat seal / polypropylene ID 200 X OD 450 X W 200 mm heat seal / polypropylene ID 8 X OD 18 X W 8 in.			
Strap Width		5, 6, 9, 12, 15.5 mm 1/4, 3/8, 1/2, 5/8 in.			
Strap Tension		Max. 784 N (80 kgf) Max. 178 lbsf.			
Power Supply		100-120, 200-240 V 1 Phase 50 / 60 Hz 0.65 KVA			

# RQ-8LD & RQ-8LS