

# Strapack




## High Speed Paper/Film Tape Banding Machine



OB-360N



\*with optional  
Large dispenser  
stand

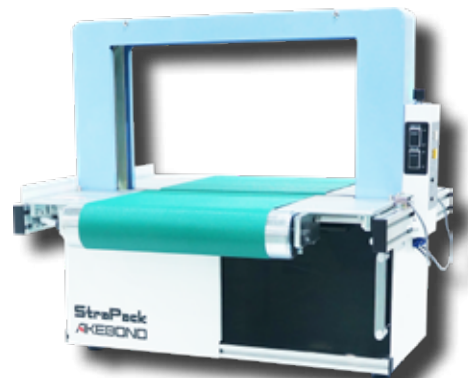

OB-360NA  
\*driven belt table

# OB-360N/OB-360NA

# OB-360N/OB-360NA

## High Speed Paper/Film Tape Banding Machine

### OB-360N :

#### ■ High Speed

Up to 30 cycles per minute. Soft or elastic bundles can be banded without sacrificing the speed.

#### ■ Versatile

- Applies banding to packages as small as 30mm (1-1/8") wide x 10mm (3/8") high up to 420mm (16-1/2") wide x 210mm (8-1/4") high.
- Either paper or film tape can be used.
- Larger arch size is available upon request.

#### ■ Various Tension

Tension is easily adjustable, with a volume dial, from 5N to 60N (approx. 1 - 13.5lbsf) to accommodate various applications.

#### ■ Friendly Operation

- A cycle can be activated by simply placing a bundle on the table, pressing the Start button or stepping on the foot pedal.
- The machine will not operate accidentally without a package on the table.
- In case of feeding issues, the reset function allows the machine to quickly return to its starting position.

### OB-360NA (driven belt table) :

#### ■ Ideal for fully-automatic packaging line

- The number of the automatic banding cycle is selectable from Free (Passing), 1 band, 2 bands or manual operation with switches on the operation panel.
- Photocell Switches can be adjusted easily on the rails mounted on the both sides of the tables.
- A Standard OB-360NA comes with signals below, which makes it suitable for your fully automatic packaging line.
  - \*An input signal to stop the conveyor flow when the line is full.
  - \*Output signals for Machine Ready, Cycle Completion and Error.

#### ■ Standard Specifications

Model		OB-360N	OB-360NA (driven belt table)
Arch Size		W 425 x H 216 mm	W 425 x H 207 mm
Dimension	Width	570 mm	635 mm
	Height	489 mm	489 mm
	Depth	282 mm	563 mm
	Weight	25.5 kg	48 kg
Table Height		238 mm	247 mm
Min. Package Size		W 30 x H 10 mm	W 100 x H 30 x D 150 mm
Max. Package Size		W 420 x H 210 mm	W300 x H200 mm
Tape		W 30 mm x 190 m 80 g (paper), W 30 mm x 200-370 m 60-110 µm (film)	
Max. Package Weight		-	5 kg
Conveyor Speed		-	13 m/min.
Strap Tension	60µm Film	5-30 N (0.5-3 kgf)	
	110µm Film	5-60 N (0.5-6.1 kgf)	
	80g (28oz.)Paper	5-45 N (0.5-4.6 kgf)	
Power Supply		110, 120, 220, 230, 240V Single Phase 50/60Hz 250W	

Dimensions and specifications are subject to change without notice.

Modification rights reserved.

© 2020 Strapack Corporation

#### DISTRIBUTED BY:

**STRAPACK CORPORATION**  
8-16-6 Ginza, Chuo-ku, Tokyo, 104-0061, JAPAN  
Phone 81-3-6278-1806 Fax. 81-3-6278-1807  
(URL) <http://www.strapack.com> (E-mail) [info@strapack.com](mailto:info@strapack.com)  
**STRAPACK INC.**  
33508 Central Avenue, Union City, CA 94587-2097 U.S.A.  
Phone 1-510-475-6000 Fax. 1-510-475-6090  
**STRAPACK, N.V./S.A.**  
Uilenbaan 200, B-2160 Wommelgem, BELGIUM  
Phone 32-(0)3-355-1520 Fax. 32-(0)3-355-1521



ISO 9001 and 14001 Certified